


# U050



grip dimensions according to no. U014

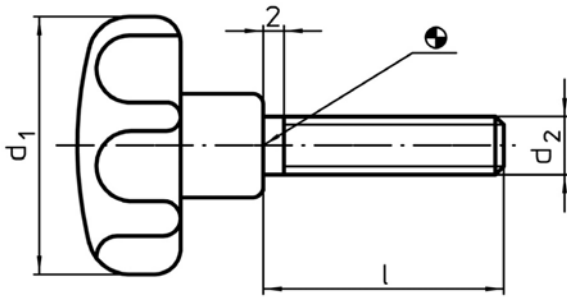

**Material**

Duroplast PF 31 to DIN 7708, black.  
Grub screw: steel, galvanised.

**Technical Notes**

Special designs e.g. different lengths or grub screws in brass or stainless steel, on request.  
Temperature range max. 110°C.

Order No.	d <sub>1</sub>	d <sub>2</sub>	l	g
U050.AC051	25	M 5	10	5,0
U050.AC054	25	M 5	15	5,5
U050.AC056	25	M 5	20	6,0
U050.AC058	25	M 5	25	6,5
U050.AC060	25	M 5	30	7,0
U050.AC102	32	M 6	15	14,5
U050.AC104	32	M 6	20	15,0
U050.AC106	32	M 6	25	16,0
U050.AC108	32	M 6	30	17,0
U050.AC110	32	M 6	40	18,0
U050.AC152	40	M 8	20	27,0
U050.AC154	40	M 8	25	29,0
U050.AC156	40	M 8	30	31,0
U050.AC158	40	M 8	40	33,0
U050.AC160	40	M 8	50	36,0
U050.AC202	50	M10	25	52,0
U050.AC204	50	M10	30	55,0
U050.AC206	50	M10	40	59,0
U050.AC208	50	M10	50	63,0
U050.AC210	50	M10	60	68,0
U050.AC252	63	M12	30	95,0
U050.AC254	63	M12	40	100,0
U050.AC256	63	M12	50	108,0
U050.AC258	63	M12	60	116,0
U050.AC260	63	M12	80	127,0
U050.AC302	80	M16	40	180,0
U050.AC304	80	M16	50	190,0
U050.AC306	80	M16	60	205,0
U050.AC308	80	M16	80	225,0