













• • • **Linear Slides** • • •

Wixroyd Part No.	P0300	P0350
Weight Cap/Pair Kg	Horiz. static: 26 - 30 Kg Vert. static: 15 - 17 Kg	Horiz. static 26 - 30 Kg Vert. static 15 - 17 Kg
Slide Length mm	n/a	100 to 2000
Pieces	n/a	1
Full Extension	Linear slide	Linear slide
3/4 Extension		
Material	Plastic	Aluminium
Gauge		
Hold-in Detent		
Lever Disconnect		
Positive Stop		
Self Closing		
Soft-self Closing		
Positive Lock		



• • • **Full Extension Drawer Slides** • • •






Wixroyd Part No.	P2000	P2100	P2200	P2300	P2500	P2600	P2700
Weight Cap/Pair Kg	200	80	60	45	30	60	20
Slide Length mm	254 to 711	300 to 700	304 to 711	250 to 700	250 to 550	300 to 500	200 to 450
Pieces	3	3	3	3	3	3	3
Full Extension	•	•	•	•	•		
3/4 Extension							
Material	Steel, zinc plated	Steel, zinc plated	Steel, zinc plated	Steel, zinc plated	Steel, zinc plated	Steel, zinc plated	Steel, black coated
Gauge	2.5	2	1.8	1.2	1.2	1.2	0.8
Hold-in Detent		•	•	•	•		•
Lever Disconnect			•	•	•		•
Positive Stop	•	•	•	•	•	•	•
Self Closing							
Soft-self Closing							
Positive Lock							



• • • **Full Extension - Lever Disconnect Drawer Slides** • • •

Full Ext. - Posi. Lock

Wixroyd Part No.	P4050	P4060	P4080	P4100	P4220	P5100
Weight Cap/Pair Kg	30	100	30	45	70	45
Slide Length mm	250 to 600	300 to 750	350 to 700	300 to 700	400 to 550	250 to 700
Pieces	3	3	3	3	3	3
Full Extension	•	•	•	•	•	•
3/4 Extension						
Material	Steel, zinc plated	Steel, zinc plated	Steel, zinc plated	Steel, zinc plated	Steel, zinc plated	Steel, zinc plated
Gauge	1.2	2	1.2	1.2	1.2	1.2
Hold-in Detent	•			•		•
Lever Disconnect	•	•	•	•	•	•
Positive Stop	•	•	•	•	•	•
Self Closing	•			•		
Soft-self Closing			•		•	
Positive Lock						•



• • • **3/4 Extension** • • •

• • • **Stainless Steel Drawer Slides** • • •

Wixroyd Part No.	P6000	P6110	P7000	P7100	P7200
Weight Cap/Pair Kg	30	35	15	30	45
Slide Length mm	250 to 700	242 to 473	200 to 600	200 to 550	300 to 700
Pieces	2	2	2	3	3
Full Extension				•	•
3/4 Extension	•	•	•		
Material	Steel, zinc plated	Steel, zinc plated	Stainless steel AISI 304, Bright finish	Stainless steel AISI 304, Bright finish	Stainless steel AISI 304, Bright finish
Gauge	1.5	1.5	1	1.2	1
Hold-in Detent	•				•
Lever Disconnect	•				•
Positive Stop	•	•	•	•	•
Self Closing					
Soft-self Closing					
Positive Lock					

Weight Capacity

Weight capacity/pair Kg - is the static load per pair of drawer slides, measured at the centre of a pair of slides, side mounted, spaced 450mm apart, and is based on use of all fixing points on the slide.


Important Note: Flat mounting of drawer slides, as opposed to the standard side mounding of slides, is not recommended as it results in a greatly reduced load capacity equal to only 25% of the stated weight capacity.

Drawer Slide Terms


Slide length (SL) - the longest dimension of a fully closed slide, this should not exceed the depth of cabinet in which slide is installed.

Slide travel (TR) - distance a drawer slide moves from fully closed position. (Slide length + slide travel = fully extended slide length).

Full extension - this type of drawer slide can be extended 100% of slide length, this is standard for most 3 piece drawer slides.

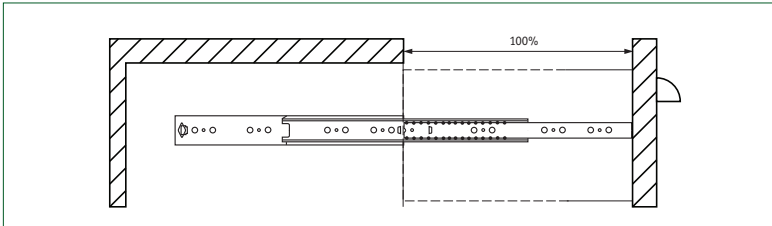

3/4 extension - this type of drawer slide extends to approx. 75% of the slide length, this is standard for most 2 piece drawer slides.

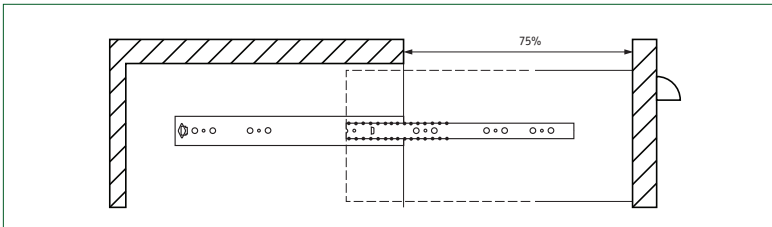

Positive stop - drawer stops at extended/open position but does not lock or detent.

Positive lock - drawer is firmly held in extended/open position by means of a mechanical catch. Drawer is released by depressing a lever and pushing drawer inward. From the extended/open position the same slide may be disconnected by depressing the lever and pulling the drawer out.

Hold-in detent - drawer is firmly held in closed position, and released by pulling drawer open (also known as positive catch).

Lever disconnect - from the extended/open position the slide may be disconnected by depressing lever and pulling drawer out.

Self-closing - toward end of drawer slide closing stroke, slide is drawn into the fully closed position.

Soft self-closing - toward end of drawer slide closing stroke, slide movement is slowed and then drawn into fully closed position.

Side Mounting Tolerances

When mounting we recommend a side space equal to the slide thickness with an additional 0,2 to 0,5 mm for optimal positioning. Mounting with less than 0,2 mm side tolerance can result in poor running of the drawer slide and jamming of the slide - the same is true if tolerances over 0,5mm are used. Ensure cabinet/enclosure faces are square and parallel prior to mounting of the drawer slides.

