




# Low Profile Cam Edge Clamps

lever actuation

# Low Profile Side Clamping

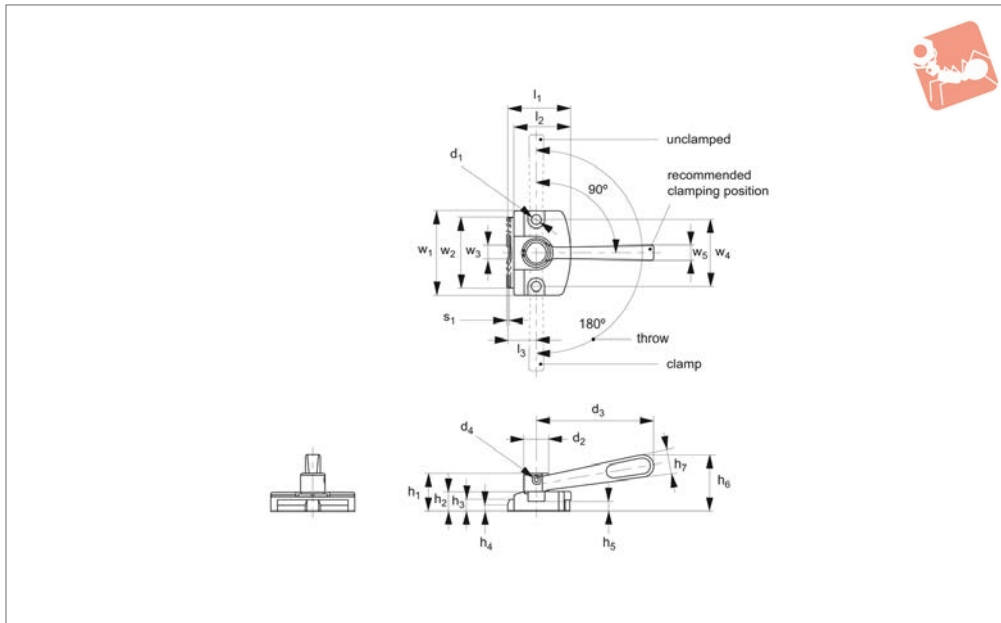

**10980.2**

LOW PROFILE SIDE CLAMPING

### Material

Body: steel (C45), black oxide finish.  
 Jaw/cam: steel (42CrMo), tempered, black oxide finish.  
 Handle: steel (C45), tempered, black oxide finish.

Turning the wrench allows the cam to move the jaw forward for clamping. When the wrench is turned back for unclamping, the loaded spring allows the jaw to return to the original position.

### Technical Notes

Designed to prevent part lift.

### Tips

Ensure that mounting surfaces are finished to 6.3a or better, without any scratches or

Order No.	Clamping stroke $s_1$	$d_1$	$d_2$	$d_3$	$d_4$	$l_1$	$l_2$	$l_3$	Weight g
10980.W0138	1	5.2	13	63	M 4x0,7-4L	33.5	30.5	15	130
10980.W0160	2	8.2	19	100	M 5x0,8-5L	50.0	46.0	22	440

Order No.	$h_1$	$h_2$	$h_3$	$h_4$	$h_5$	$h_6$	$h_7$	$w_1$	$w_2$	$w_3$	$w_4$	$w_5$	Torque to Nm max.	Clamping force kN max.
10980.W0138	20	10	6	3	5	30	12	45	38	8	36	8	17	4
10980.W0160	30	15	9	5	7	46	18	70	60	12	55	12	28	6

