




Compression Latch - Flexi System

insert driver - fixed grip - zinc



Compression Latches

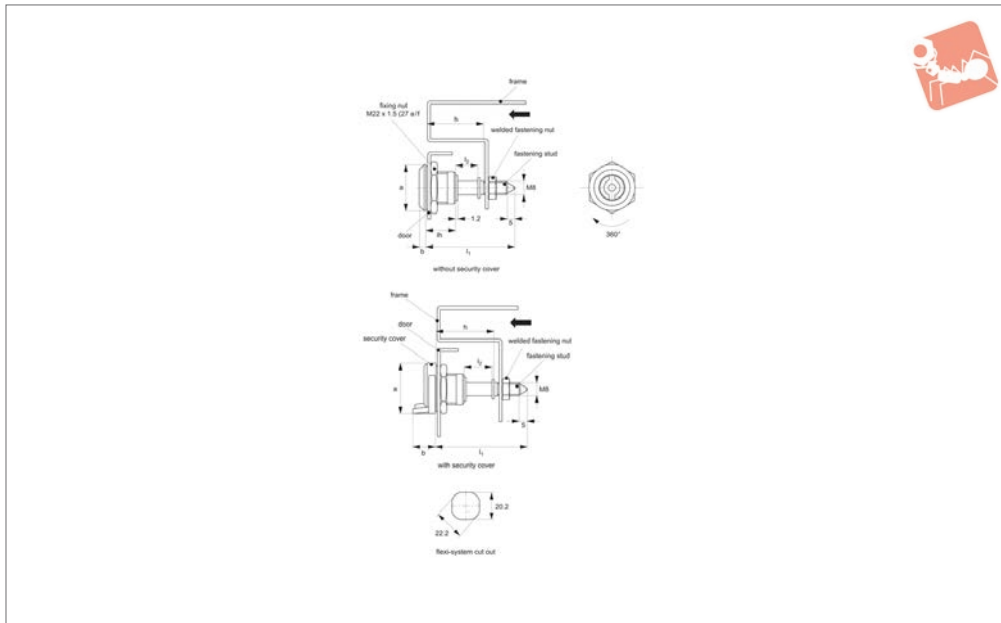

A1580

COMPRESSION LATCHES

Material

Body: die cast zinc, bright chrome plated.
Insert: steel.

Not supplied: KEY - order separately.

Technical Notes

Order key separately.

Keys: see A0102.AW0060.

Insert driver compression latch enabling tight securing of enclosure door. Via welding a fastening nut (M 8) to the enclosure frame the fastening stud can be engaged and turned until the enclosure door is adequately tightened and secured (use triangle 7 key A0102.AW0060 to activate driver).

vate driver).

Tips

Security cover type can be secured with wire or cable tie for tamper evident security.

h = grip length.

Order No.	Insert type	Lock type	a	b	lh	l ₁	l ₂	h
A1580.AW0023	Triangle 7	W/o Security Cover	28	4	18	40	2.5	23
A1580.AW0028	Triangle 7	W/o Security Cover	28	4	18	46	7.5	28
A1580.AW0034	Triangle 7	W/o Security Cover	28	4	18	54	13.5	34
A1580.AW0223	Triangle 7	With Security Cover	29	13	18	40	2.5	23
A1580.AW0228	Triangle 7	With Security Cover	29	13	18	46	7.5	28
A1580.AW0234	Triangle 7	With Security Cover	29	13	18	54	13.5	34

