


Drawer Slide - 3/4 Extension 15 Kg load per pair - stainless

Stainless Steel Slides



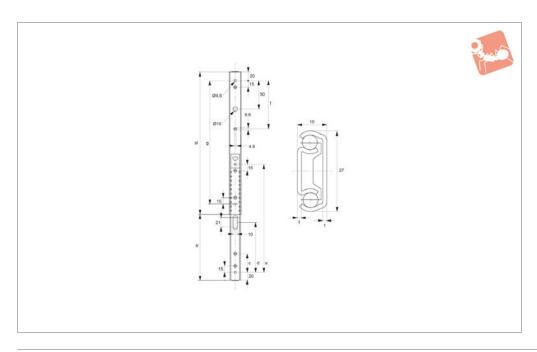

P7000

Material

Stainless steel, AISI 304. Bright finish.

Technical Notes

Positive stop.

These slides have been tested to 60,000 usage cycles.

Important Notes

Load capacity is static load per pair, at the

centre of the rails using all mounting holes. **Sold individually as single slides.**

Order No.	Slide length sl	Slide travel tr	С	d	е	f	g	Load/pair kg max.	Weight g
P7000.AC0200	200	160	-	-	-	-	-	15	150
P7000.AC0250	250	150	100	160	210	110	210	15	175
P7000.AC0300	300	200	100	210	260	160	260	15	200
P7000.AC0350	350	250	100	260	310	210	310	15	245
P7000.AC0400	400	275	180	286	360	180	360	15	255
P7000.AC0450	450	305	180	318	410	230	410	15	300
P7000.AC0500	500	355	180	365	460	280	460	15	345
P7000.AC0550	550	400	180	224	510	280	510	15	400
P7000.AC0600	600	440	180	224	560	280	560	15	450




Drawer Slide - Full Extension 30 Kg load per pair - stainless



STAINLESS STEEL



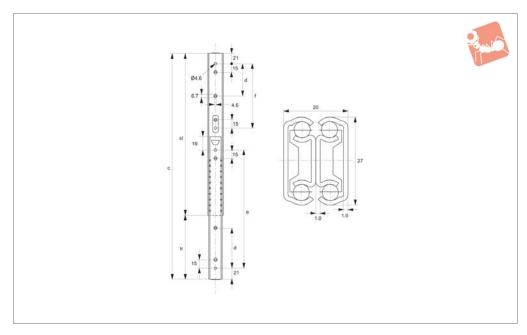

Material

Stainless steel AISI 304. Bright finish.

Technical Notes

Positive stop.

These slides have been tested to 60,000 usage cycles.

Important Notes

Load capacity is static load per pair, at the

centre of the rails using all mounting holes. **Sold individually as single slides.**


Order No.	Slide length sl	Slide travel tr	С	d	е	f	Load/pair kg max.	Weight g
P7100.AC0200	200	210	415	-	-	-	30	280
P7100.AC0250	250	260	515	85	210	-	30	345
P7100.AC0300	300	310	615	160	260	260	30	415
P7100.AC0350	350	360	715	210	310	310	30	500
P7100.AC0400	400	410	815	180	360	360	30	590
P7100.AC0450	450	460	915	230	410	410	30	645
P7100.AC0500	500	510	1015	280	460	460	30	705
P7100.AC0550	550	560	1100	230	352	352	30	740



Drawer Slide - Full Extension

lever disconnect - 45 Kg load per pair - stainless

Stainless Steel Slides

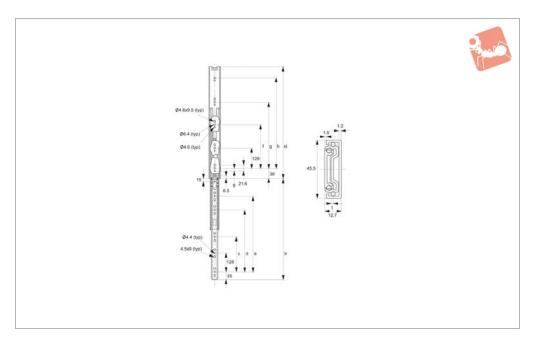



P7200

Material

Stainless steel AISI 304. Bright finish.

Technical Notes

Hold-in detent when slide closed. Positive stop. Rails can be disconnected via pres-

sing disconnect lever.

These slides have been tested to 60,000 usage cycles.

Important Notes

Load capacity is static load per pair, at the

centre of the rails using all mounting holes. **Sold individually as single slides.**

Order No.	Slide length sl	Slide travel tr	С	d	е	f	g	h	Load/pair	Weight
									kg	g
									max.	
P7200.AC0300	300	312	128	-	-	-	-	-	45	500
P7200.AC0350	350	362	128	-	-	-	-	-	45	590
P7200.AC0400	400	412	128	224	-	-	-	-	45	670
P7200.AC0450	450	462	128	224	-	-	-	-	45	775
P7200.AC0500	500	512	128	224	320	-	320	-	45	830
P7200.AC0550	550	562	128	224	352	-	352	-	45	910
P7200.AC0600	600	612	128	224	352	416	352	-	45	990
P7200.AC0700	700	705	320	514	630	255	450	630	45	1100





Weight capacity

Weight capacity/pair Kg - is the static load per pair of drawer slides, measured at the centre of a pair of slides, side mounted, spaced 450mm apart, and is based on use of all fixing points on the slide.


Important Note: Flat mounting of drawer slides, as opposed to the standard side mounding of slides, is not recommended as it results in a greatly reduced load capacity equal to only 25% of the stated weight capacity.

Drawer slide terms

STAINLESS STEEL SLIDES

Slide length (sl) The longest dimension of a fully closed slide, this should not exceed the depth of cabinet in which slide is installed.

Slide travel (tr) Distance a drawer slide moves from fully closed position. (slide length + slide travel = fully extended slide length).

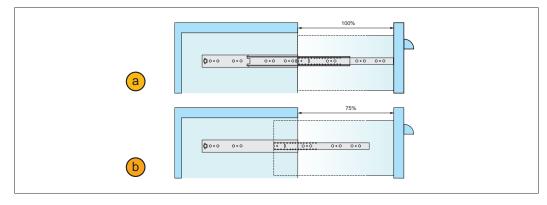

Full extension This type of drawer slide can be extended 100% of slide length, this is standard for

most 3 piece drawer slides. a

3/4 extension This type of drawer slide extends to approx. 75% of the slide length, this is

standard for most 2 piece drawer slides. **b**

Positive stop Drawer stops at extended/open position but does not lock or detent.

Positive lock Drawer is firmly held in extended/open position by means of a mechanical catch.

Drawer is

released by depressing a lever and pushing drawer inward. From the extended/ open position the same slide may be disconnected by depressing the lever and

pulling the drawer out.

Hold-in detent Drawer is firmly held in closed position, and released by pulling drawer open

(also known as positive catch).

Lever disconnect From the extended/open position the slide may be disconnected by depressing

lever and pulling drawer out.

Self-closing Toward end of drawer slide closing stroke, slide is drawn into the fully

closed position.

Soft self-closing Toward end of drawer slide closing stroke, slide movement is slowed and then

drawn into fully closed position.


wixroyd.com

Side mounting tolerances

When mounting we recommend a side space equal to the slide thickness with an additional 0,2 to 0,5 mm for optimal positioning.

Mounting with less than 0,2 mm side tolerance can result in poor running of the drawer slide and jamming of the slide - the same is true if tolerances over 0,5mm are used.

Ensure cabinet/enclosure faces are square and parallel prior to mounting of the drawer slides.

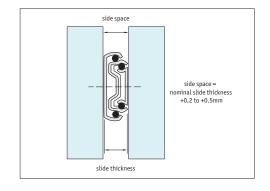





Wixroyd Drawer Slides

product selection charts

Full Extension - Draw	Weight Cap/Pair Kg	Slide Length mm	Full Extension	3/4 Extension	Steel, Zinc Plate	Stainless Steel	Hold-in Detent	Lever Disconnect	Positive Stop	Self Closing	Soft Self Closing	Positive Lock
Full Extension - Draw P2000	200	254- 711	✓		✓				✓			
P2100	80	300- 700	1		1		1		1			
P2200	60	304- 711	1		1		1	1	1			
P2300	45	250- 700	s		1		s	s	s			
P2500	30	250- 550	1		✓		✓	✓	✓			
P2600	60	300- 500	s		1				s			
30.5±0.1	20	200- 450	J		√		1	1	1			

Full Extension - Leve	Weight Cap/Pair Kg	Slide Length mm	Full Extension	3/4 Extension	Steel, Zinc Plate p	Stainless Steel	Hold-in Detent	Lever Disconnect	Positive Stop	Self Closing	Soft Self Closing	Positive Lock
Full Extension - Leve P4050	r Dis	connec	t Dr	awe	r Sli	des						
36 - 12 - 12	30	250- 600	s		1		s	s	s	s		
P4080	30	350- 700	1		1			✓	1		✓	
P4100	45	300- 700	s		1		s	s	s	s		
Full Extension - Positiv	e St	op Drav	ver	Slid	es							
P5100	45	250- 700	1		1		1	✓	1			✓
3/4 Extension Drawer	Slide	es										
P6000	30	250- 700		1	✓		✓	✓	1			
Stainless Steel Drawer	Slid	es										
27	15	200- 600		1		1			1			
P7100 P7200	30	200- 550	J			/			J			
45.5	45	300- 700	1			✓			1			

