




# Horizontal Acting Toggle Clamps

safety lever - open arm - horizontal base

# Safety Lever Toggle Clamps

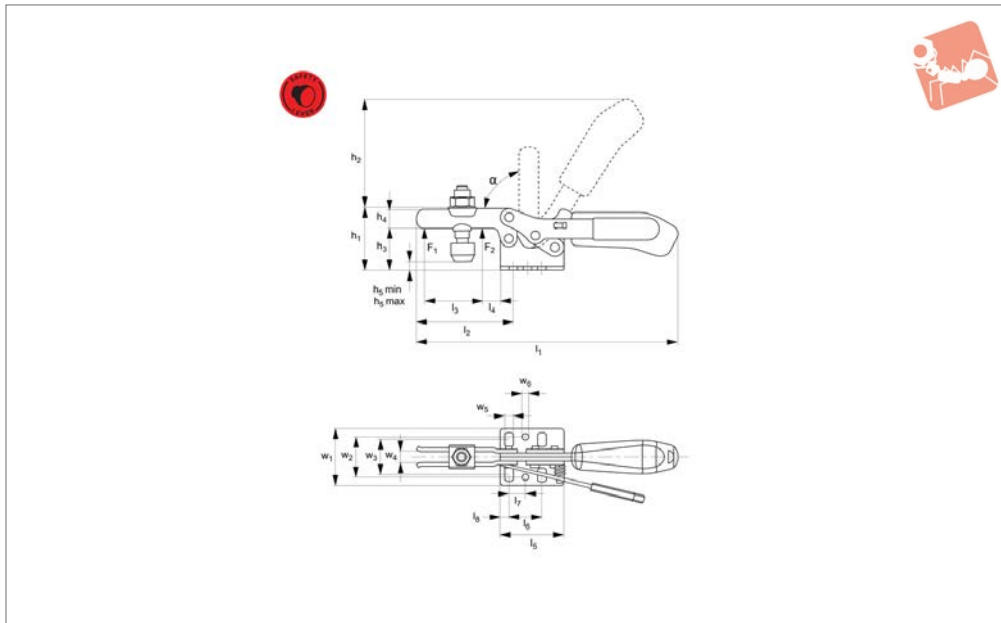

## 41010

SAFETY LEVER TOGGLE CLAMPS

### Material

Body: steel, zinc plated.  
 Rivets: stainless steel running in hardened bushes. Pre-lubricated bearings (grease suitable for food industry use).  
 Ergonomic soft feel oil-resistant handle

with large grip area.  
 Supplied complete with clamping screw (with rubber pad).

### Technical Notes

The safety lever holds the clamp in both

the open and the closed position. This prevents opening under vibration or inadvertent movement of the clamping arm when loading or unloading a fixture.

Temperature range -10°C to +80°C.

Order No.	Size	F <sub>1</sub> kN	F <sub>2</sub> kN	Clamping screw	h <sub>1</sub>	h <sub>2</sub>	h <sub>3</sub>	h <sub>4</sub>	h <sub>5</sub> min.	h <sub>5</sub> max.	l <sub>1</sub>	l <sub>2</sub>	Weight g
41010.W0003	3	1.8	2.5	M 8x45	48.5	86.0	32	15	-2	9	206	73	390
41010.W0004	4	2.0	3.0	M 8x65	75.0	126.5	45	20	-4	24	287	113	800

Order No.	l <sub>3</sub>	l <sub>4</sub>	l <sub>5</sub>	l <sub>6</sub>	l <sub>7</sub>	l <sub>8</sub>	w <sub>1</sub>	w <sub>2</sub>	w <sub>3</sub>	w <sub>4</sub>	w <sub>5</sub>	w <sub>6</sub>	α
41010.W0003	38	14	50	25.7	13.0	7	45.5	31.6	22,0-31,8	8	6.5	5.1	90°
41010.W0004	63	27	57	41.0	20.5	8	58.0	43.0	29,0-43,0	10	8.5	8.5	90°

# Safety Lever Toggle Clamps

## Horizontal Acting Toggle Clamps


safety lever - solid arm - horizontal base



SAFETY LEVER TOGGLE CLAMPS



### 41040

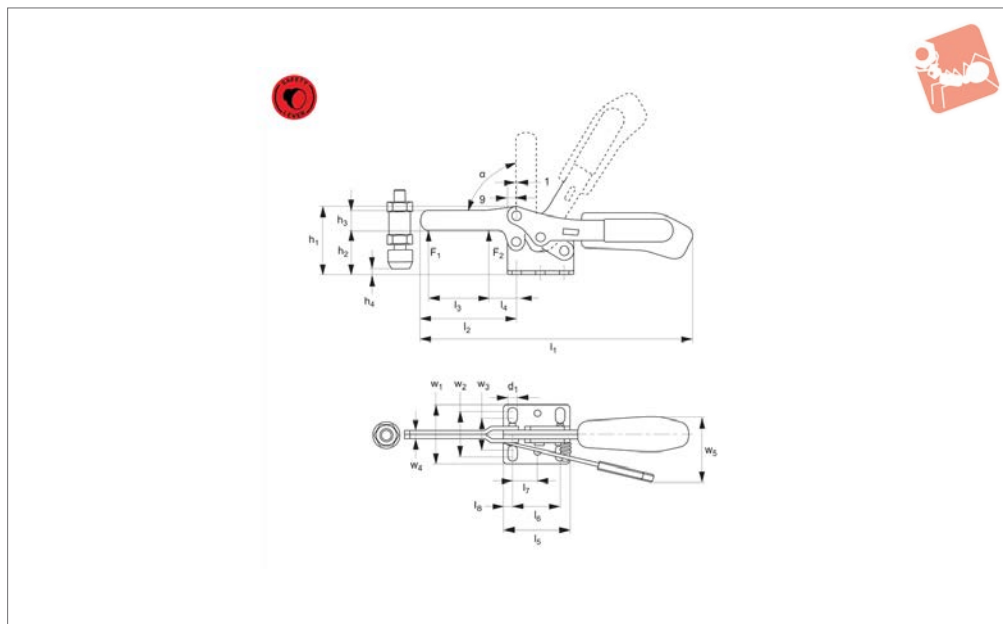

#### Material

Body: steel, zinc plated. Rivets: stainless steel running in hardened bushes. Pre-lubricated bearings (grease suitable for food industry use). Ergonomic soft feel oil-resistant handle

with large grip area.

Supplied complete with weldable clamping screw (with rubber pad).

#### Technical Notes

The safety lever holds the clamp in both

the open and the closed position. This prevents opening under vibration or inadvertent movement of the clamping arm when loading or unloading a fixture. Temperature range -10°C to +80°C.


Order No.	Size	F <sub>1</sub> kN	F <sub>2</sub> kN	Clamping screw	h <sub>1</sub>	h <sub>2</sub>	h <sub>3</sub>	h <sub>4</sub> min.	h <sub>4</sub> max.	l <sub>1</sub>	l <sub>2</sub>	Weight g	
41040.W0004	4	2	3	M 8x65	75	45	20	-6	23	286	111	800	
Order No.	l <sub>3</sub>	l <sub>4</sub>	l <sub>5</sub>	l <sub>6</sub>	l <sub>7</sub>	l <sub>8</sub>	w <sub>1</sub>	w <sub>2</sub>	w <sub>3</sub>	w <sub>4</sub>	w <sub>5</sub>	d <sub>1</sub>	α
41040.W0004	66	34	57	41	20.5	8	58	43	29	8	56.3	8.5	90°



# Horizontal Toggle Clamps

safety lever - open arm - vertical base

# Safety Lever Toggle Clamps

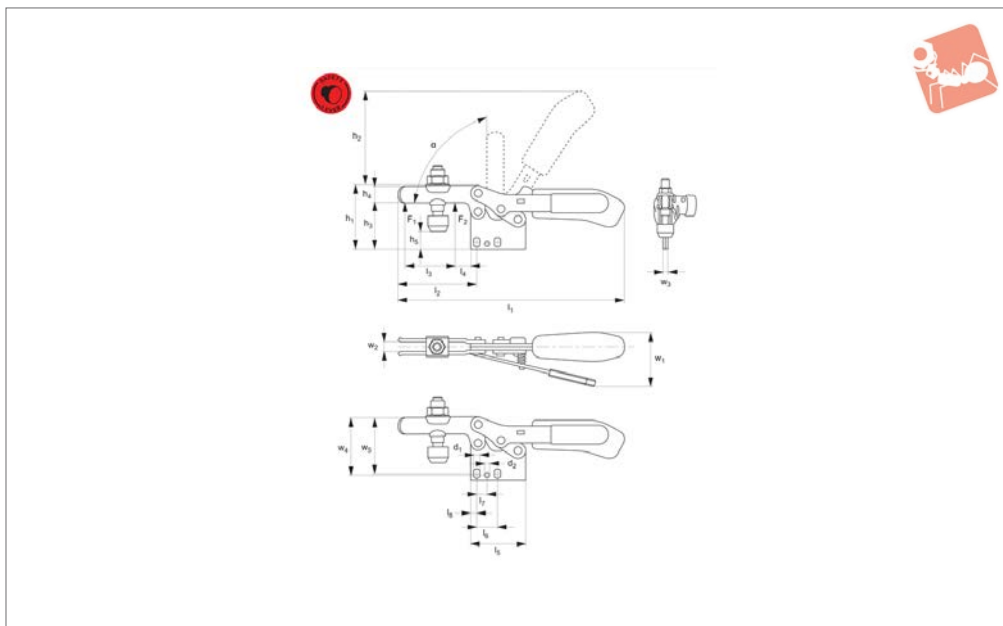

**41060.1**

SAFETY LEVER TOGGLE CLAMPS

### Material

Body: steel, zinc plated. Rivets: stainless steel running in hardened bushes. Pre-lubricated bearings (grease suitable for food industry use). Ergonomic soft feel oil-resistant handle

with large grip area.

Supplied complete with weldable clamping screw (with rubber pad).

### Technical Notes

The safety lever holds the clamp in both

the open and the closed position. This prevents opening under vibration or inadvertent movement of the clamping arm when loading or unloading a fixture. Temperature range -10°C to +80°C.

Order No.	Size	F <sub>1</sub> kN	F <sub>2</sub> kN	Clamping screw	h <sub>1</sub>	h <sub>2</sub>	h <sub>3</sub>	h <sub>4</sub>	h <sub>5</sub> min.	h <sub>5</sub> max.	l <sub>1</sub>	l <sub>2</sub>	Weight g
<b>41060.W0003</b>	3	1.8	2.5	M 8x45	65	86	49.0	15	14.5	26	206	73	390
<b>41060.W0004</b>	4	2.0	3.0	M 8x65	97	126	66.5	20	17.5	46	287	113	800

Order No.	l <sub>3</sub>	l <sub>4</sub>	l <sub>5</sub>	l <sub>6</sub>	l <sub>7</sub>	l <sub>8</sub>	w <sub>1</sub>	w <sub>2</sub>	w <sub>3</sub>	w <sub>4</sub>	w <sub>5</sub>	d <sub>1</sub>	d <sub>2</sub>	α
<b>41060.W0003</b>	38	14	50	25.7	13.0	7	48	8	6	42	37,5-42,5	6.5	5.1	90°
<b>41060.W0004</b>	63	27	57	41.0	20.5	8	51	10	8	59	52,0-59,0	8.5	8.5	90°